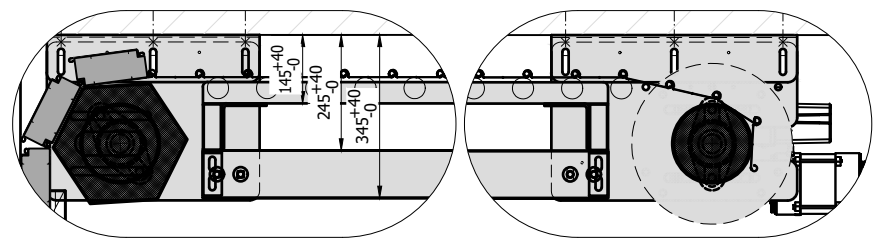
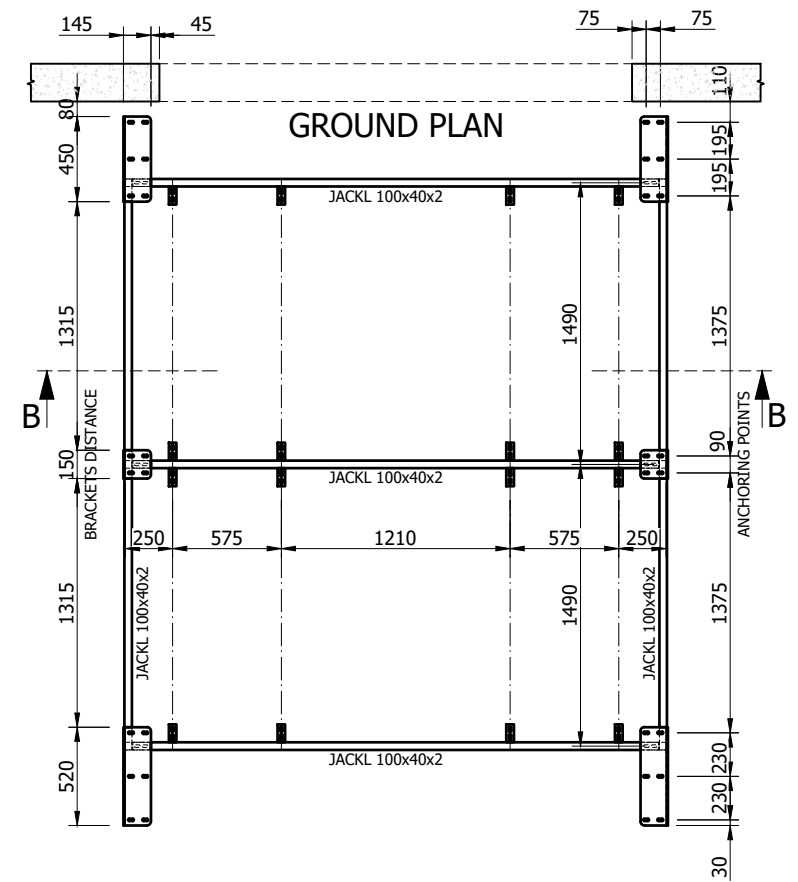
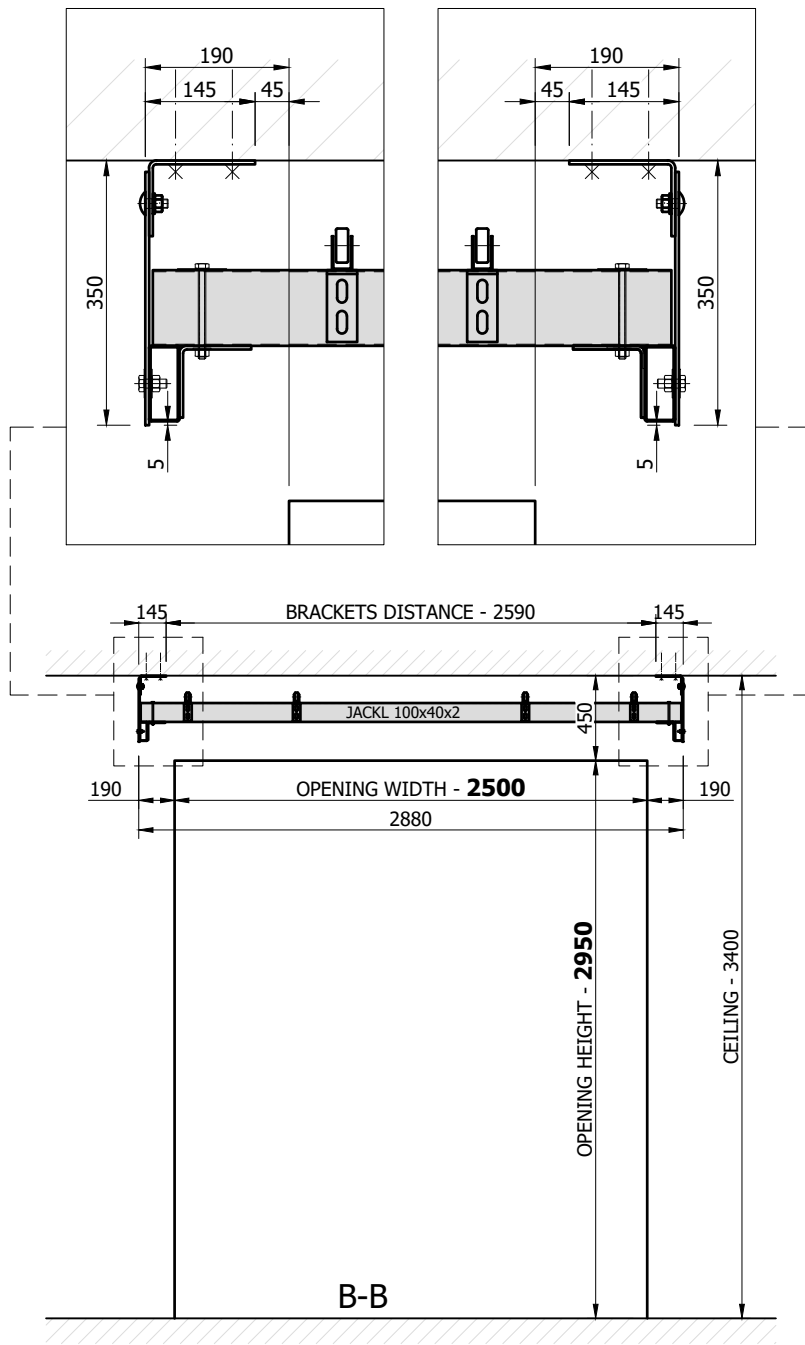




MAX. MOVEMENTS/H	14
AVERAGE GATE SPEED	0,176 m/s
MOTOR UTILIZATION	92 %

Top coat: **GALVANIZED**

SERIAL NR.	TYPE RGS-H	FIRE RESISTANCE EI₂ 60-C						
ORDER NR.	PROJECT							
PRICE OFFER NR.	CUSTOMER							
ITEM 01	DRAWING 01.00	RGS-H 2,50 x 2,95 m						
DATE	DRAWN BY	GEOMETRICAL TOLERANCES	PROJECTION [ISO E]	SCALE	PCS	WEIGHT [kg]	MATERIAL SEMI PRODUCT	 BRANDPORTAR SWEDEN Industrial Firedoor Solutions
28.4.2021	PAVY	ISO 2768-mL		1:40 1:8	1	750	---	



SERIAL NR.		TYPE RGS-H		FIRE RESISTANCE EI₂ 60-C				
ORDER NR.		PROJECT						
PRICE OFFER NR.		CUSTOMER						
ITEM	01	DRAWING	01.01	HORIZONTAL STEEL STRUCTURE				
DATE	DRAWN BY	GEOMETRICAL TOLERANCES	PROJECTION [ISO E]	SCALE	PCS	WEIGHT [kg]	MATERIAL SEMI PRODUCT	 Industrial Firedoor Solutions
28.4.2021	PAVY	ISO 2768-mL		1:40 1:16, 1:10	-	---	---	